


RF to DALI Converter

- RF DALI master, 6 in 1 function, support single color, color temperature, RGB, RGBW, RGB+CCT, or switch light control.
- Match with RF 2.4G single zone or multiple zone remote control.
- 1 DALI address, support DT6 dimming, DT8-TC color temperature, DT8-RGB, DT8-RGBW or DT7 switch.
- In accordance with DALI standard protocol IEC 62386 and in compliance with DALI products from other international incorporation.
- Powered by DALI bus or 24VDC.
- Enable to select DALI address by encoding switch, support unicast, group and broadcast mode.
- For RGB/RGBW/RGB+CCT light type, built-in 10 dynamic modes, including jump or gradient.





Technical Parameters

Input and Output		Environment		Package	
Power input	DALI bus/24VDC	Operation temperature	Ta: -20°C ~ +50°C	Size	L60 x W 60 x H40mm
Static current	1.5mA@16VDC, 2mA@24VDC	Case temperature (Max.)	Tc: +55°C	Gross weight	0.060kg
Input signal	RF 2.4GHz	IP rating	IP20	Warranty	
Output signal	DALI	Warranty 5 years			
Remote control distance	30m(open and barrier-free)				


Mechanical Structures and Installations

Rotary coding switch for setting DALI address

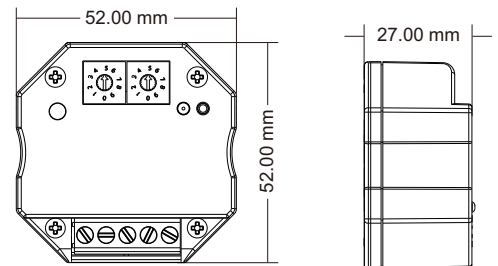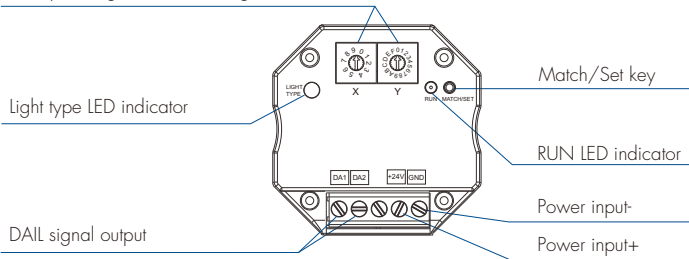


Wiring Diagram

1. DALI bus power supply

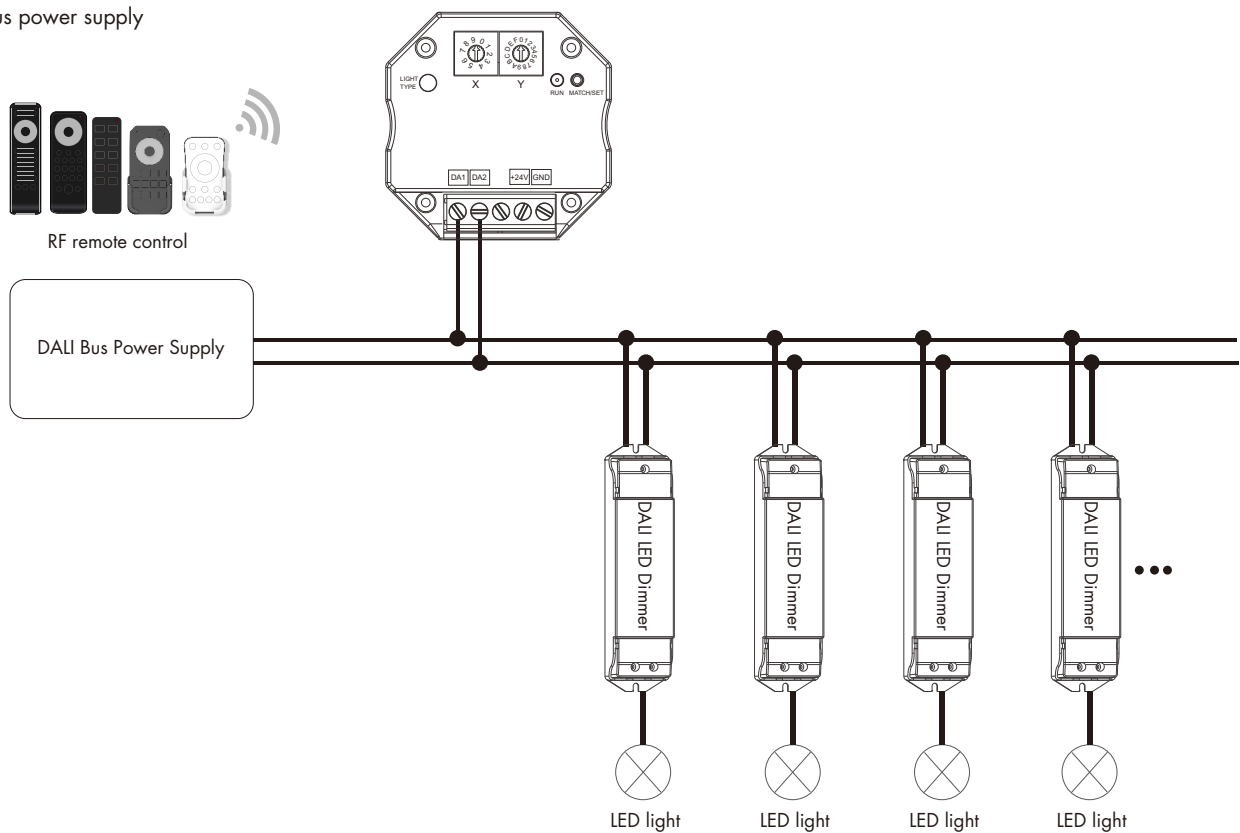

2. 24VDC power supply

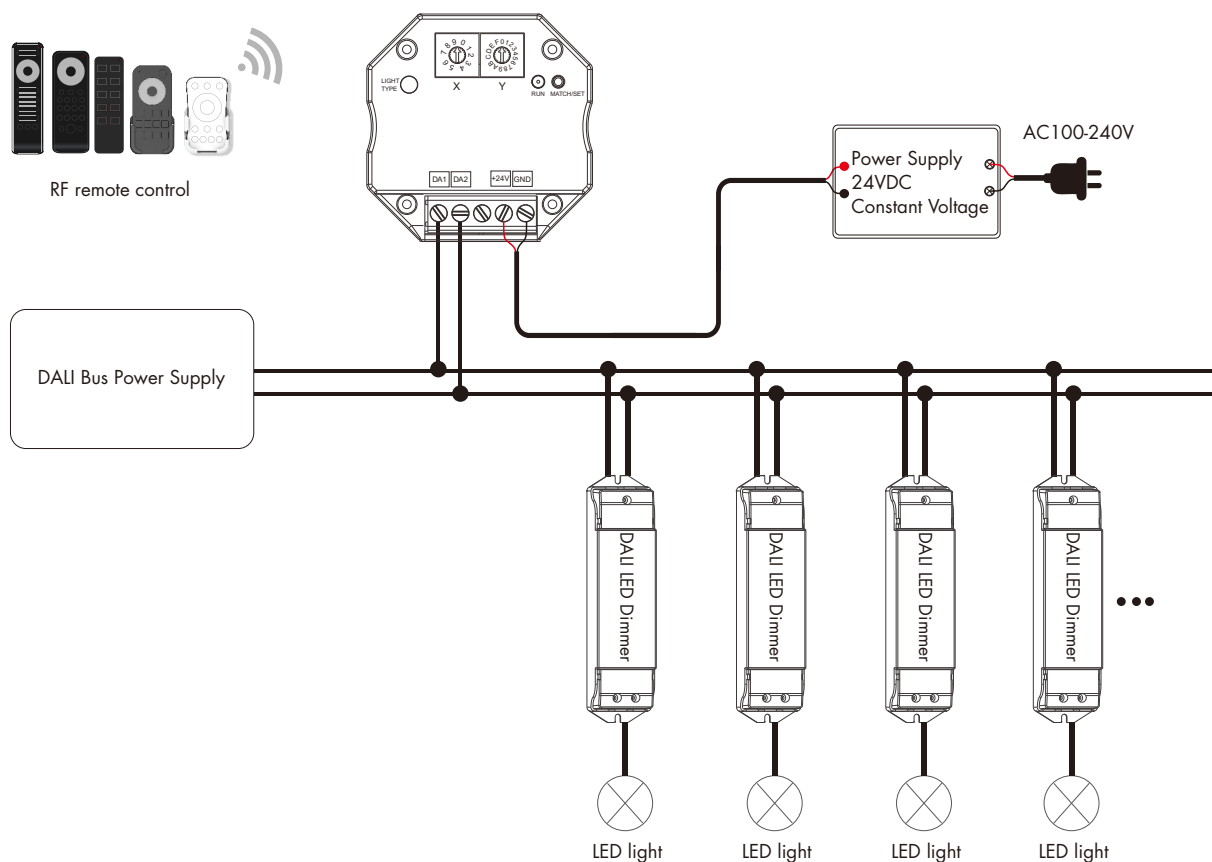

Note: It is recommended to use a 24VDC power supply for the DALI master to reduce the load on the DALI bus power supply.

Light type settings

SWITCH	C
DIM	W
CCT	Y
RGB	R
RGBW	G
RGB+CCT	B

Please select the light type before match the remote control.

Press and hold Match/Set key for 2s, switch 6 kinds light type in sequence, and light type LED indicator turn corresponding color.

White: DIM

Yellow: CCT

Red: RGB

Green: RGBW

Blue: RGB+CCT

Cyan: SWITCH

Match Remote Control (two match ways)

Please select the same light type of RF remote control for matching, End user can choose the suitable match/delete ways. Two options are offered for selection:

Use the Match key

Match:

Short press match key, immediately press on/off key (single zone remote) or zone key (multiple zone remote) on the remote.

The RUN LED indicator fast flash a few times means match is successful.

Delete:

Press and hold match key for 5s to delete all match,

The RUN LED indicator fast flash a few times means all matched remotes were deleted.

Use Power Restart

Match:

Switch off the power of the receiver, then switch on power, repeat again.

Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 3 times on the remote.

The RUN LED indicator blinks 3 times means match is successful.

Delete:

Switch off the power of the receiver, then switch on power, repeat again.

Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 5 times on the remote.


The RUN LED indicator blinks 5 times means all matched remotes were deleted.

DAI address setting

Address value = X * 10 + Y.

For example: X = 5, Y = 4, Address value = 5 x 10 + 4 = 54.

Unicast mode




X is 0-6, Y is 0-9.

Address value 0-63 correspond to DALI unicast address 00-63.

For example:

Address value = 40, the unicast address value is 40.

Group mode




X is 7, Y is 0-F.

Address value 70-7F correspond to DALI group address 0-15.

For example:

Address value = 75, the group address value is 5.

Broadcast mode



X is 9, Y is 0-F.

Address value 90 - 9F correspond to broadcast address.

Dynamic mode list

Ten built-in dynamic modes can be called up with the remote control's mode button.

RGB/RGBW light dynamic mode list:

No.	Name	No.	Name
1	RGB jump	6	RGB fade in and out
2	RGB smooth	7	Red fade in and out
3	6 color jump	8	Green fade in and out
4	6 color smooth	9	Blue fade in and out
5	Yellow cyan purple smooth	10	White fade in and out

RGB+CCT light dynamic mode list:

No.	Name	No.	Name
1	RGB jump	6	RGB fade in and out
2	RGB smooth	7	Red fade in and out
3	6 color jump	8	Green fade in and out
4	6 color smooth	9	Blue fade in and out
5	Color temperature smooth	10	White fade in and out